

**DURABLE, OIL-RESISTANT, TRIPLE-DIPPED PVC GLOVE**

SKYTEC CH101 features a soft comfortable cotton lining and a rough textured PVC coating that ensures grip in contact with oils and chemicals.

**FEATURES**

- › A flexible, soft glove that absorbs perspiration, for ultra comfortable extended wear and with good mechanical resistance
- › Seals and protects the hand against chemicals while remaining flexible
- › Impermeable for working in damp or greasy environments, enabling you to grip objects securely
- › Excellent abrasion resistance (EN388 Level 4)
- › Surface provides tactile feel and better grip
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin
- › Forearm well protected
- › Thickness: 1.3mm



**SUITABLE FOR**

**Typical Industries**

- Agriculture
- Chemical
- Forestry & Fishing
- Manufacturing
- Municipal Services
- Oil & Gas

**Suitable Applications**

- Assembly
- Chemical Processing
- Cleaning
- Handling Oily Objects
- Heavy Duty Handling
- Maintenance of Plant
- Refining

**CERTIFICATION**



See overleaf for explanation

## PRODUCTION INFORMATION

<b>MATERIALS</b>	LINER:	Cotton
	COATING:	PVC
<b>COLOUR</b>	Dark blue	
<b>LENGTH (mm)</b>	300 (Size dependant)	
<b>CUFF STYLE</b>	Gauntlet	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00067DD	12 pairs per bag
8/M	SKG00067DF	
9/L	SKG00067DH	
10/XL	SKG00067DJ	72 pairs per case
11/XXL	SKG00067DL	
12/XXXL	SKG00067DN	


## RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

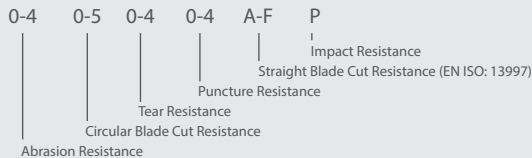

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%		
D	Dichloromethane	M	65% Nitric acid	B	≥30 min for at least 3 chemicals
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide	C	≥10 min for at least 1 chemical
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

# GLOBUS

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)

**T:** +44 (0)161 877 4747

**F:** +44 (0)161 877 4746

## MIDDLE EAST & AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

**T:** +971 4 882 9962

**F:** +971 4 882 9963

## GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CTC, 4 rue Hermann Frenkel 69367 Lyon cedex 07 FRANCE. (Notified Body No. 0075)